

Studio 2 OTG

快速入门指南


简介

感谢您选择Studio 2 OTG。这是一款二进二出的音频接口，带有手机OTG接口及3.5mm手机接口，为您提供更快捷方便的直播体验。具备两路高品质话放与24bit/192kHz高精度采样，支持Windows低延迟ASIO驱动及Mac下免驱使用。在开始使用之前请阅读此手册，以帮助您快速了解Studio 2 OTG的基本功能。

产品特性

- 24bit/192kHz高精度的二进二出的音频接口
- 两路Mic/Line/Hi-Z混合输入接口，带48V幻象电源和独立增益调节旋钮，高阻抗模式可接吉他贝斯等乐器
- 输入增益旋钮带双色信号指示灯，方便查看输入信号的增益量
- 可独立调节耳机音量和主输出监听音量
- 两路LED电平表，实时显示输出电平
- 零延时直接监听和立体声/单声道监听切换功能
- 支持手机OTG及3.5mm接口连接
- 可独立控制OTG输入/输出信号开关
- 高速USB2.0(支持3.0)接口

硬件功能

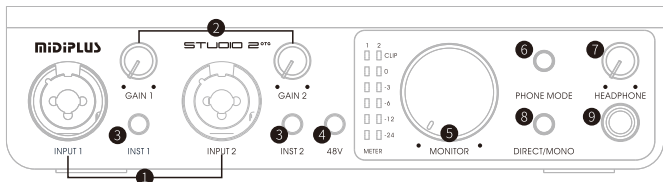

1. Mic/Line/Hi-Z混合输入接口:用于通过XLR连接麦克风或通过6.35mm插头连接乐器(例如电吉他)或线路输入
2. 输入增益旋钮:用于调节麦克风、乐器或线路输入信号的增益量,逆时针

旋转减小增益量, 顺时针旋转增加增益量, 旋钮灯为输入电平指示灯, 过载时亮红色

3. 乐器输入开关按钮: 用于切换6.35mm输入接口的乐器/线路输入, 按钮灯熄灭时为线路输入, 按钮灯点亮时为乐器输入
4. 48V幻象电源开关: 开启输入1/2通道的48V幻象电源供电
5. 主音量旋钮: 用于调节主输出的音量, 逆时针旋转减小音量, 顺时针旋转增加音量
6. 手机OTG开关: 亮粉色灯表示同时开启手机和声卡双向传输信号
 - ①短按开关: 按压开关小于两秒时, 红灯亮表示开启手机OTG信号传输至声卡, 红灯灭则关闭
 - ②长按开关: 按压开关大于等于两秒时, 白灯亮表示开启声卡音频信号传输至手机, 白灯熄灭则关闭
7. 耳机音量旋钮: 用于调节耳机输出的音量, 逆时针旋转减小音量, 顺时针旋转增加音量, 旋钮灯为USB识别指示灯, 连接电脑且被正确识别时亮灯
8. 直接监听模式按钮: 用于控制输入通道的直接监听模式, 按钮灯亮蓝色时表示立体声监听模式, 按钮灯亮绿色时表示单声道监听模式, 熄灭为关闭直接监听模式
9. 耳机接口: 6.35mm立体声耳机输出接口



10. 主输出接口: 用于连接主监听音箱
11. 3.5mm手机OTG连接口: 使用3.5mm 双头TRRS线连接手机
12. Type-C手机OTG连接口: 使用Type-C线连接手机
13. USB接口: 用于连接电脑

开始使用

1. 连接: 使用附带的USB连接线将MIDIPLUS Studio 2 OTG接到电脑并被正确识别后, 耳机旋钮灯将会亮起

2. 安装驱动

Windows用户：<http://www.midiplus.com/cn/support.aspx?id=1>


MacOS: 无需安装驱动

3. 设置默认声音设备

Windows用户: 转到设置→系统→声音, 然后选择Studio 2 OTG为输入/输出设备

MacOS用户: 转到系统偏好设置→声音, 然后选择Studio 2 OTG为输入/输出设备

4. 连接示例

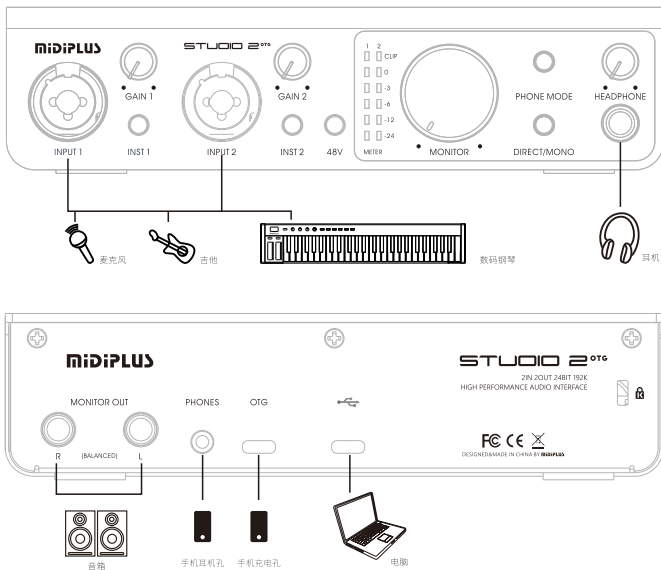

产品规格

型号	Studio 2 OTG
位深度/采样率	24bit/192kHz
I/O接口	2个Mic/Line/Hi-Z混合接口 1个6.35mm监听耳机接口 2个6.35mm监听音箱接口 1个3.5mm手机OTG接口 1个Type-C手机OTG接口 1个Type-C电脑接口
按键	2个INST乐器高阻抗开关 1个手机OTG功能开关 1个48V幻象电源开关 1个立体声/单声道监听切换按键
旋钮	2个输入增益旋钮 1个主输出音量旋钮 1个监听耳机音量旋钮
尺寸	186mm*116mm*47mm
附件	USB线、快速入门手册、音频转接头、信息卡、 双头3.5mmTRRS线

Studio 2 OTG

Quick Start Guide


Introduction

Thank you for choosing Studio 2 OTG audio interface. Studio 2 OTG is a 2 in 2 out USB audio interface, with built-in OTG port and 3.5mm phone jack, providing you with a faster and more convenient live streaming experience. Two high quality microphone preamp and 24bit/192kHz high resolution sampling rate, support low-latency ASIO driver on Windows OS and will work straight away without needing to install any drivers on macOS. Please read this manual before you start using, to help you quickly understand the basic operations and features of Studio 2 OTG.

Features

- 2 In / 2 Out USB audio interface with 24 bit/192 kHz audio resolution
- 2 Mic/Line/Hi-Z combo input with 48V phantom power supply and Input Gain control
- 2 colors Input level LED
- Independent monitor output volume and headphone volume control
- 2 level meters
- Zero latency Stereo/Mono Direct monitor
- Connect to your mobile phone through OTG or 3.5mm jack
- OTG input/output
- High Speed USB 2.0 and bus powered

Hardware Features

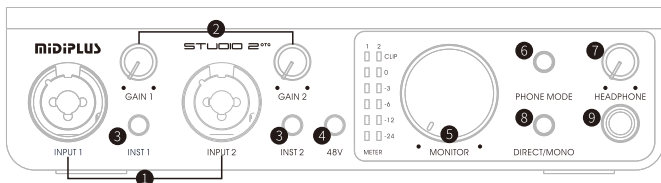

1. Mic/Line/Hi-Z combo input: Connect microphone via XLR or use the 6.35mm jack to connect your instrument (such as electric guitar) or line input.
2. Input gain control: Adjust the gain level of microphone, instrument or line input. Rotate counterclockwise to reduce the gain level and clockwise to

increase the gain level.

- Instrument input switch button: Switch instrument/line input of 6.35mm input. Line in when the button light is off, instrument in when the button light is on.
- 48V phantom power switch: Turn on 48V phantom power supply of input 1 / 2 channel.
- Monitor output level control: Adjust the monitor outputs level. Rotate counterclockwise to reduce the level and clockwise to increase the level.
- OTG switch: The button lights Pink means both the OTG Input and Output are turned on
 - Press the switch, the button lights red means turn on the route from mobile phone to OTG, press the switch twice to turn off the route.
 - Long press the switch over 2 seconds, the button lights white means turn on the route from OTG to mobile phone, long press the switch again to turn off the route
- Headphone output level control: Adjust the headphone output level, rotate counterclockwise to reduce the level, and rotate clockwise to increase the level, and the knob light is the USB status LED.
- Direct monitoring mode Switch: Stereo direct monitoring when the button lights Blue, and Mono direct monitoring when the button lights Green, when the button lights off means Direct monitoring is turned off.
- Headphone output: 6.35mm stereo output, connect to your headphone.



- Monitor output: Connect to your monitor.
- 3.5mm Phone jack: Connect to your mobile phone via the 3.5 TRRS cable.
- Type-C OTG port: Connect to your mobile phone via the Type-C cable.
- USB port: Connect to your computer.

Start Using

- Connect

Connect the Studio 2 OTG to computer by using the included USB cable, the USB status LED on Headphone knob will light on.

2. Installation

Windows: Go to <http://www.midiplus.com/support.aspx?id=1> download and install the latest driver.


macOS: No need to install any drivers.

3. Setting the default sound device

Windows: Go to Settings > System > Sound and then selecting the Studio 2 OTG as your device for Input and Output.

macOS: Go to System Preferences > Sound and then selecting the Studio 2 OTG as your device for Input and Output.

Connection Example

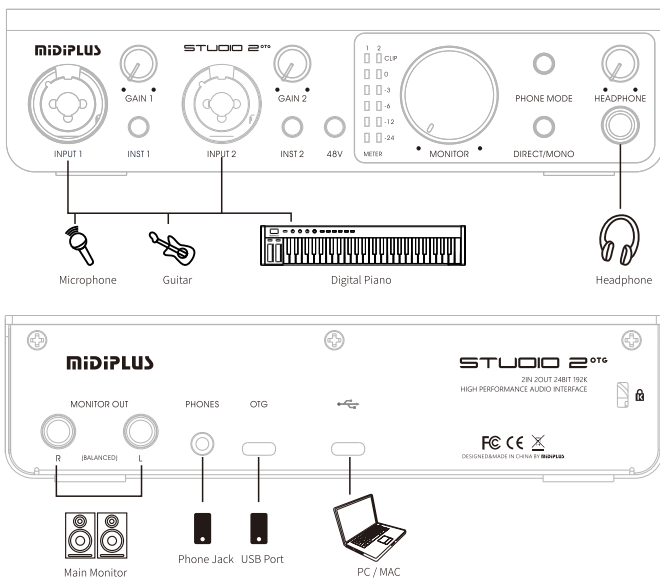

Specifications:

Model	Studio 2 OTG
Bit depth/Sample rate	24bit/192kHz
I/O	2 x Mic/Line/Hi-Z Combo Input 1 x 1/4" Headphone Output 2 x 1/4" Monitor Outputs 1 x 1/8" Phone jack 1 x OTG port 1 x USB port
Buttons	2 x Hi-Z Switch 1 x OTG Switch 1 x 48V Switch 1 x Direct Monitor mode Switch
Knobs	2 x Input Gain control 1 x Monitor level control 1 x Headphone Volume control
Dimensions	186mm x 116mm x 47mm
Accessories	1 x USB Cable 1 x Quick Start Guide 1 x 1/4" to 1/8" adapter 1 x Information paper 1 x 1/8" to 1/8" TRRS cable